


PPTC


Axial lead, Round
Series

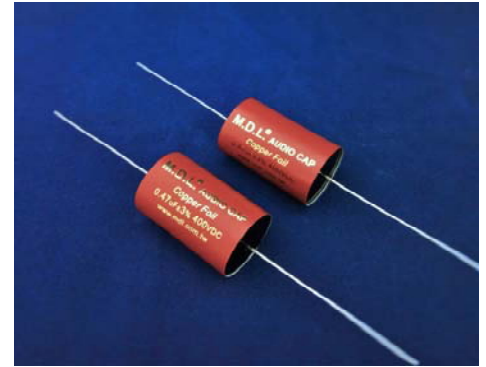

Features

- Pure copper foil and polypropylene film capacitors
- mainly suitable for the high frequency divider
- Designed for the most transparent sound possible
- Copper foil is an addictive sound! Big soundstage and fast!
- The OFC oxygen free copper pins
- Oxygen-free, non-inductive copper foil design with polypropylene dielectric

1) Dimensions:



2) Specifications:

- (1) Material : Pure copper foil and polypropylene film capacitors
- (2) Voltage rating : 200VDC, 400VDC, 600VDC
- (3) Capacitance tolerance : ±3% or ±5% at 1K HZ
- (4) Dissipation factor : MAX 0.02% at 1K Hz 25°C
- (5) Temperature range : - 55°C ~ +105°C
- (6) Terminal leads are made from copper

3) MAX SIZE(D x L)

Unit : mm

W.V. SIZE CAP(μF)	200 VDC			400 VDC			600VDC		
	D±2	L±2	φ d	D±2	L±2	φ d	D±2	L±2	φ d
0.10							19	36	1.2
0.15							22	36	1.2
0.22				17	36	1.0	23	36	1.2
							19	46	1.2
0.33				20	36	1.2	27	36	1.2
							23	46	1.2
0.47	17	36	1.0	23	36	1.2	26	46	1.2
				19	46	1.2			
0.68	20	36	1.2	27	36	1.2	31	46	1.2
				23	46	1.2			
0.82							34	46	1.2
1.0	24	36	1.2	27	46	1.2	37	46	1.2
	20	46	1.2						
1.5	28	36	1.2	32	46	1.2			
	24	46	1.2						
2.0	27	46	1.2	37	46	1.2			
2.2	28	46	1.2						
3.3	34	46	1.2						
4.0	37	46	1.2						

ANY SPECIAL VALUE ARE ACCEPTABLE, ITS SIZE TO BE PROVIDED UPON REQUESTED SIZE MAYBE CHANGED W/O NOTICE. SPECIAL SIZE IS ACCEPTABLE

- 如有需特殊尺寸 / 容量-請洽本公司.
- 以上為參考尺寸,如有更動不另行通知.
- <https://WWW.MDL.COM.TW>