


B06 B06R & B06A Type Series

B06

1) Dimensions (外觀型式):

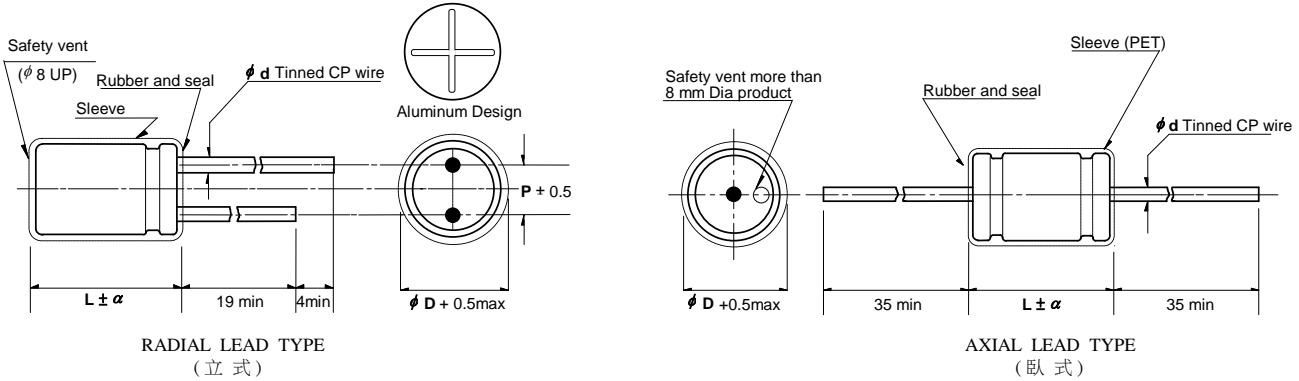

Unit (mm)

φ D	8	10	13	16	18	22
φ d	0.5	0.6	0.6	0.6	0.8	0.8
P	3.5	3.5	5.0	5.0	7.5	7.5
α	1.0	1.0	1.5	1.5	1.5	2.0

φ D	8	10	13	16	18	22
φ d	0.6	0.6	0.8	0.8	0.8	0.8
α	0.8	1.5	2.0	2.0	2.0	2.0

2) Capacitance Tolerance (容量誤差) : ±10% (K) at 1KHZ

3) Leakage Current (洩漏電流) : MAX. 0.03CV + 3μA After 5 minutes application of rated working voltage (MAX.0.03CV + 3μA, 印加額定電壓5分鐘後測定)

4) Temp Range (工作溫度範圍) : - 40°C ~ + 105°C

5) Load Life (壽命測試) : After 1,000 hours application of rated voltage at 105 ±2°C, capacitors meet the characteristics requirement listed at right. (以下數值是在印加額定電壓及105±2°C於1,000小時後測定)

(a) Capacitance change: Within ±25% of initial (電容量改變: 不超過±25%的初始值)

(b) Tan δ :200% or less of initial specified (損失角: 不超過200%的初始值)

(c) Leakage current : Install specified value or less (洩漏電流: 不超過初期規格)

6) MAX Dissipation Factor (最大損失角): MAX 6% at 1KHz

B06R SERIES

B06A SERIES

RADIAL LEADS (立式)				
CAP(μF)	50 V		100 V	
	SIZE φ D*L(mm)	M.D.L. Code	SIZE φ D*L(mm)	M.D.L. Code
1	10*15	B06R-050K0101015	10*15	B06R-100K0101015
1.5	10*15	B06R-050K1R51015	10*15	B06R-100K1R51015
2.2	10*15	B06R-050K2R21015	10*15	B06R-100K2R21015
3.3	10*15	B06R-050K3R31015	10*15	B06R-100K3R31015
4.7	10*15	B06R-050K4R71015	10*15	B06R-100K4R71015
6.8	10*15	B06R-050K6R81015	10*20	B06R-100K6R81020
10	10*20	B06R-050K1001020	10*20	B06R-100K1001020
15	13*21	B06R-050K1501321	13*21	B06R-100K1501321
22	13*21	B06R-050K2201321	13*21	B06R-100K2201321
33	13*21	B06R-050K3301321	13*26	B06R-100K3301326
47	13*26	B06R-050K4701326	13*26	B06R-100K4701326
56	13*26	B06R-050K5601326	13*26	B06R-100K5601326
68	16*27	B06R-050K6801627	16*27	B06R-100K6801627
100	16*27	B06R-050K1011627	16*32	B06R-100K1011632
150	16*38	B06R-050K1511627	18*38	B06R-100K1511838
200	16*38	B06R-050K2011638	22*38	B06R-100K2012238

AXIAL LEADS (臥式)				
CAP(μF)	50 V		100 V	
	SIZE φ D*L(mm)	M.D.L. Code	SIZE φ D*L(mm)	M.D.L. Code
1	10*19	B06A-050K0101019	10*19	B06A-100K0101019
1.5	10*19	B06A-050K1R51019	10*19	B06A-100K1R51019
2.2	10*19	B06A-050K2R21019	10*19	B06A-100K2R21019
3.3	10*19	B06A-050K3R31019	10*19	B06A-100K3R31019
4.7	10*19	B06A-050K4R71019	10*19	B06A-100K4R71019
6.8	10*24	B06A-050K6R81024	10*24	B06A-100K6R81024
10	10*24	B06A-050K1001024	10*24	B06A-100K1001024
15	13*27	B06A-050K1501327	13*27	B06A-100K1501327
22	13*27	B06A-050K2201327	13*27	B06A-100K2201327
33	13*27	B06A-050K3301327	13*31	B06A-100K3301331
47	13*31	B06A-050K4701331	13*31	B06A-100K4701331
56	13*31	B06A-050K5601331	13*31	B06A-100K5601331
68	16*34	B06A-050K6801634	16*34	B06A-100K6801634
100	16*34	B06A-050K1011634	16*38	B06A-100K1011638
150	16*43	B06A-050K1511643	18*44	B06A-100K1511844
200	16*43	B06A-050K2011643	22*44	B06A-100K2012244

ANY SPECIAL VALUE ARE ACCEPTABLE, ITS SIZE TO BE PROVIDED UPON REQUESTED
 SIZE MAYBE CHANGED W/O NOTICE. SPECIAL SIZE IS ACCEPTABLE

如有需特殊尺寸 / 容量-請洽本公司.

尺寸如有更動, 不另行通知.

http://WWW.MDL.COM.TW